


KUBE K è la KUBE K is POS professional keyboard offered by CUSTOM.
 KUBE K is provided with 20x2 LCD backlight display and with serial interface with pass-through function. Its 73 keys are programmable and key labels may be customized with specific descriptions for each department.
 6 positions key switch can be used to turn on the keyboard and also for programming functions.
 Metallic support base guarantees keyboard stability.
 KUBE K is suitable for CUSTOM DTK53, SMICE POS, KUBE POS mini systems and also for different customer applications.
 KUBE K24
 - 24 customized keys
 - compact and ergonomic
 - completely programmed with included software
 - it can be connected in PS2 mode
 - dimensions (mm): 173x106x50



KUBE D is a smart and functional LCD customer display, 40 characters, 20x2 LCD backlit, suitable for ECR and POS systems.
 KUBE D has an adjustable display panel which allows a view angle from 8° to 35°, 270mm height pole and support base already arranged for CUSTOM KUBE and SMICE printers fastening.
 This display can be single or double side (KUBE DD), assuring clearness to cash point information.
 KUBE D is provided with RS232 serial interface with selectable baud rate from 600 to 38400bps.
 KUBE D is supplied directly by CUSTOM printer (optionally can be equipped of serial cable and power supply).
 KUBE DL
 - single and double side
 - high visibility backlit display
 - 2 lines for 20 characters
 - connection to KUBE F fiscal printers
 - single side display can be fixed to the printer
 - support base is available (optional for single side model)
 - PC connecting kit

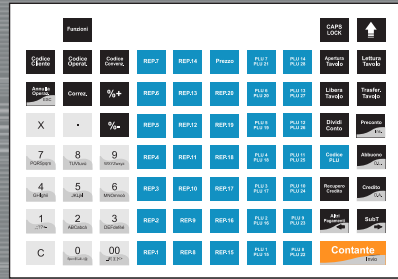

KUBE D / KUBE K



	Kube D - Kube DL	Kube K - Kube K24
	Customer Display	24/73 Keys Professional Keyboard
Display specifications	Display method	Backlight liquid crystal display
	Number of characters	40 (20 columns x 2 lines)
	Backlight color	Green
Character specifications	Character set	96 alphanumeric; 12 international character set
	Character font	5 x 8 dot matrix
	Character size (LxH)	6 mm x 9.66 mm
	Character pitch	7.2 mm x 10.98 mm
	Space between characters	1.2 mm
	Space between rows	1.32 mm
Electrical specifications	Power supply	11 ÷ 26 Vdc ± 10%
	Power consumption	0.18A (KUBE D - Single side); 0.3A (KUBE DD- double side)
	Interface	Serial 9 pin, Serial RJ45
	Data buffer	16 KB
	Flash memory	256 KB
	Emulation	CUSTOM/POS, CD5220
Reliability	MTBF	70.000 hours
Mechanical specifications	View angle	8÷35°
	Rotation angle	360°
	Inclination angle	5°
Weight	0,5Kg (Kube DL); 1,3Kg (Kube D)	1,13Kg (Kube K); 0,37Kg (Kube K24)

