




PLUS4

4"  

PLUS4 -    4"- 112  .         



???????????

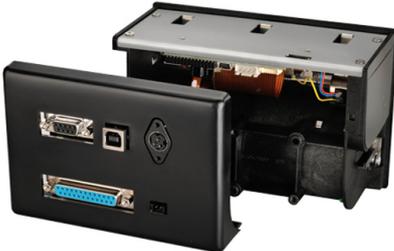

- RS232 (DB9) USB Centronics (25-) 9- 40Vdc

??? ? ???????:

- , , ,

???????????? ?

????? ?

XXXXXXXXXXXX

XXXXXXXXXXXX XXXXX

8 dots/XX

XXXXXXXXXXXX XXXXXXXXXX X XXXXXXX46 (11cpi) 59 (15cpi) 83 (20cpi)

XXXXXXXXXXXX

203 dpi

XXXXXXXXXXXX XXXXXXX (XX / XXX)

XXX50, XXXX70 XX/XXX

XXXXXXXXXXXX XXXXXXXXXX

XXXXXXXXXXXX, XXXXXXXXXXXXXXX, XXXXXXXXXXXXXXX, XXXXXXXXXXXXXXX, XXXXXXXXXXXXXXX (GB18030) X XXXXXXXXXX

XXXXXXXXXXXX XXXXXXX-XXXX

1D, PDF417 XQR CODE

XXXXXXXXXXXX XXXXXXX

112 XX (XXXX 114XX) X XXXXXXXXXXXXXXX XXXXXXXXXXXXXXXXXX XXX XXXXXXXXXXXXXXX 80 X 82.5XX

XXXXXXXXXXXX XXXXXXX

50-60 XX/XX²

XXXXXXXXXXXX XXXXXXX

XXXX104XX

XXXXXXXXXXXX XXXXXXX

XXXXXXXXXXXX XXXXXXX XXXXXXX50 XX; XXXXXXXXXXXXXXX XXXXXXX 12 XX

XXXXXXXXXXXX

XXXXXXXXXXXX XXXXXXX, XXXXXXXXXXXXXXX XXXXXXX, XXXXXXXXXXXXXXX XXXXXXX (XXX)

XXXXXXXXXXXX

XXXXXXXXXXXX Escape Command, PlusII

XXXXXXXXXXXX

RS232/TTL, miniUSB,

XXXXX XXXXXXX

2kB

XXXXX-XXXXXX

4MB

XXXXXXXXXXXX XXXXXXX

XXXXXXXXXXXX XXXXX 1 XX + XXXXXXX4 XX; XXXXXXXXXXXXXXX RAM 128KB + XXXXXXX8 XX

XXXXXXXXXXXX

Windows® (32/64 XXX) — XXXXXXX XX XXXXXXX WHQL X XXXXXXXXXXXXXXX XXXXXXXXXXXXXXX;
Linux (32/64 XXX);
XXXXXXXXXXXX COM (Linux XXX Windows 32/64 XXX);
Android™;
iOS

XXXXXXXXXXXX XXXXXXXXXXXXXXXXXXXXXXX XXXXXXX Set, XXXXXXX PowerTool, Status Monitor, Custom Windows API

XXXXXXXXXXXX

5-8 Vdc

XXXXXXXXXXXX XXXXXXX XXXXXXXXXXXXXXX XXXXXXX00 XXXXXXX (XXXXXXXXXXXX XXXXXXX)

XXXXX XXXXXXX XXXXXXXXXXXXXXX XXXXXXXXXXXXXXX/ 100 MI XXXXXXXXXXXXXXX

XXXXXXXXXXXX XXXXXXXXXXXXXXX

-10 - +60

XXXXXXXXXXXX

UL, CE, FCC, CCC

XXXXXXXXXXXX

149(L) x 97,8(H) x 71,7(W) XX 89,1(W) XX X XXXXXXX

XXXX

390XX (510XX X XXXXXXX)

???????



915GJ010100322
PRINTER PLUS4 USB RS232 TTL

